横梁式货架
beam racking

横梁货架是使用最广泛且最经济的托盘货架系统，可以提供安全和完全的可调仓储空间，它的选择性可达到100%，柱片由两根立柱与横撑、斜撑挂接而成。且横梁可以在75mm为间距上下任意调节，框架和横梁可以依据不同规格的托盘及重量来设计，巷道大小根据使用的叉车来设计，增加拦网、支撑、后档等附属配件可以达到更方便、更安全的效果。活扣式托盘货架的设计基本上可以满足任何托盘规格或重量，并可以与所有类型的叉车配套使用。我们还提供了大量配件，以适应非标准装载物品的要求。

Easily installed, cost-effective and versatile, adjustable beam racking is the most widely used of pallet storage systems and allows direct access to each pallet stored.


With adjustable beams, racking can be re-configured to accommodate changes in the type of goods stored within all kind of components and wide aisles allow access by all types of truck.







Beam racking · 横梁式货架
Jiangsu Union Logistics System Engineering Co.,Ltd.

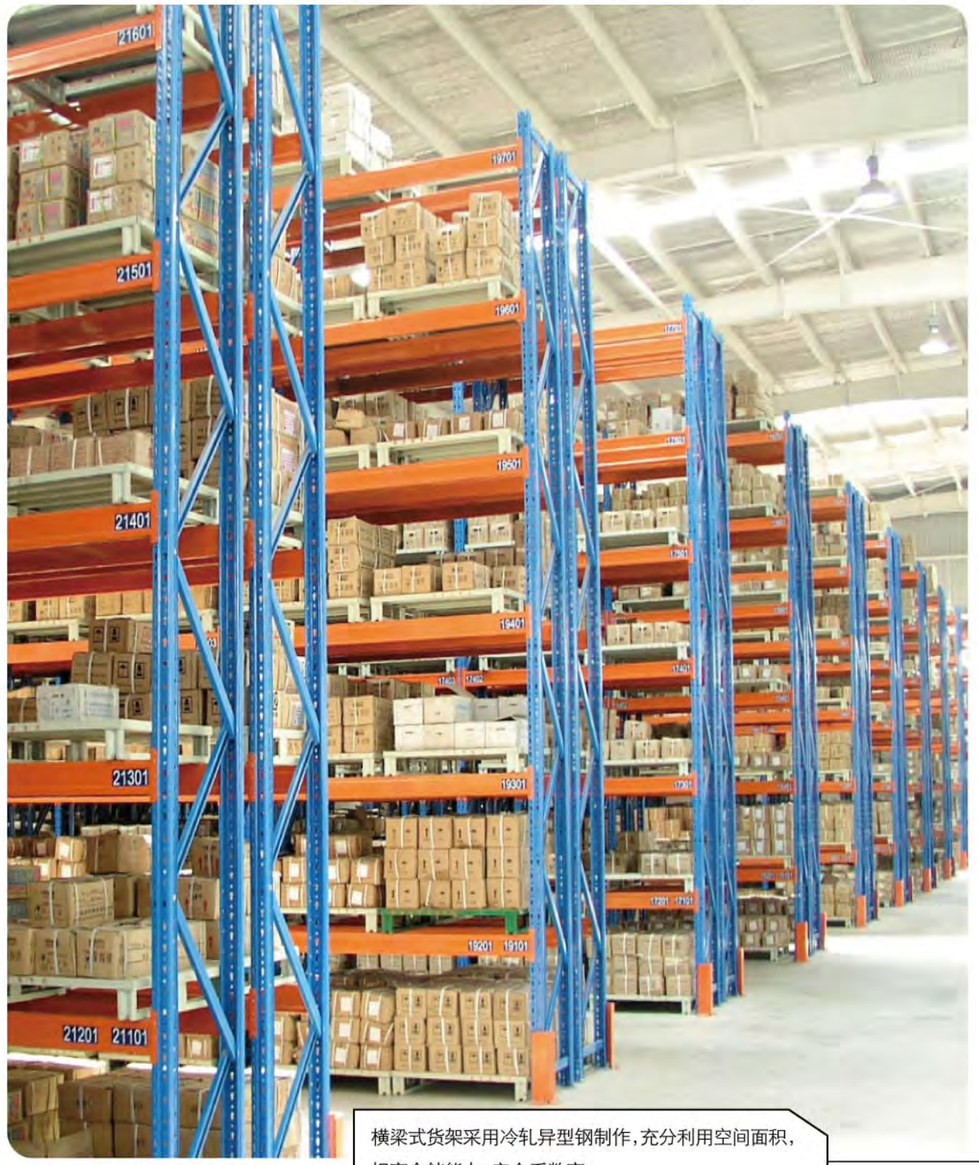

横梁式货架采用冷轧异型钢制作，充分利用空间面积，提高仓储能力，安全系数高。



Beam racking · 横梁式货架
Jiangsu Union Logistics System Engineering Co.,Ltd.



功能介绍:


- 1.储存密度高
- 2.储存的托盘有100%拣选率
- 3.可任意调整组合,施工简易,对叉车要求较低

Feature:

Cut-in composite structure ,the height of each beam can be adjusted by pitch 75/70mm freely.

Made of special-mode steel, make the best of space , increase the store capacity, with high safety factor , and can be made according to the need of customers.

横梁式货架效果图
Beam rack components

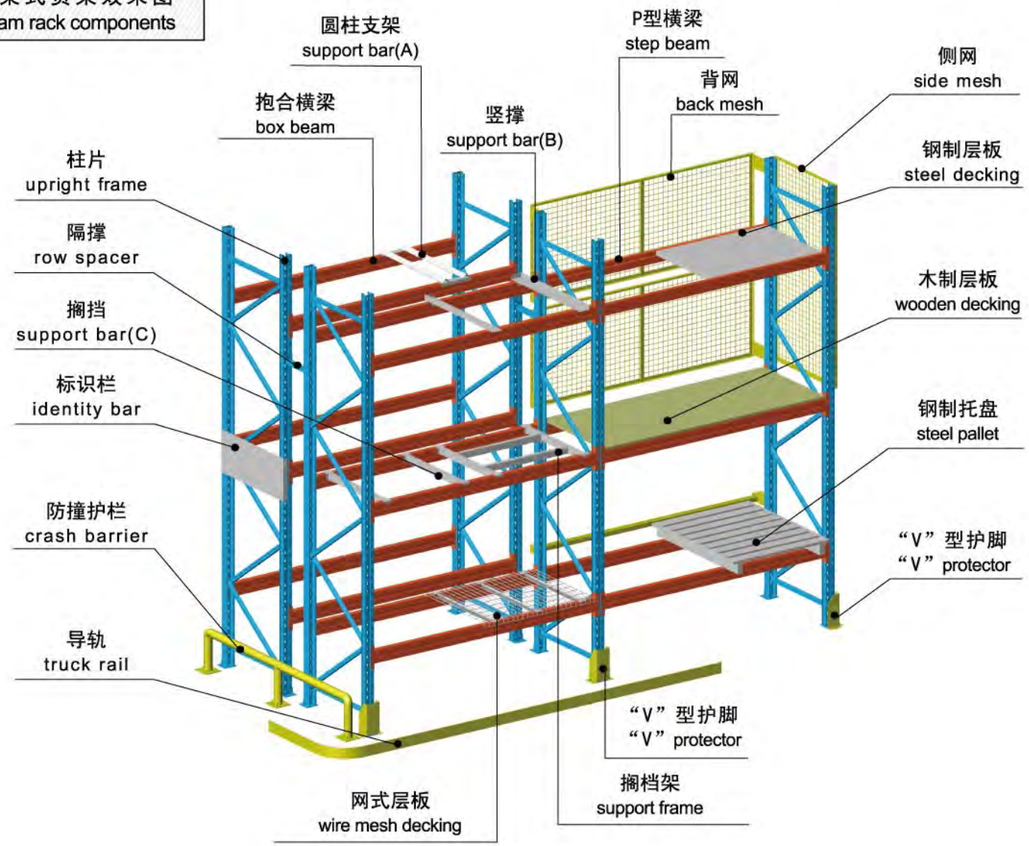


货架规格可以根据托盘类型和使用要求定制
Beam rack can design by pallet size and weight




横梁货架柱片：高度H≤12000（mm）
横梁货架柱片：深度D=d-100(150)（mm）
每层两个货位：横梁长度L=W×2+100×3 （mm）
每层三个货位：横梁长度L=W×3+100×4 （mm）


横梁货架常用规格
Typical product

L(mm) \ D(mm)		1900	2300	2500	2700	2800
900	编号	HD-1909	HD-2309	HD-2509	HD-2709	HD-2809
1000	item No.	HD-1910	HD-2310	HD-2510	HD-2710	HD-2810
1100		HD-1911	HD-2311	HD-2511	HD-2711	HD-2811



横梁货架柱片
speciafication of upright frame

立柱截面(mm) cross sectional view	厚度(mm) thickness	每组货架最大承载(kg) loading capacity
	2	8000
	2	12000
	2.3	14000
	2	14000
	2.3	16000
	2.5	18000
	2	16000
	2.5	18000
	3	20000

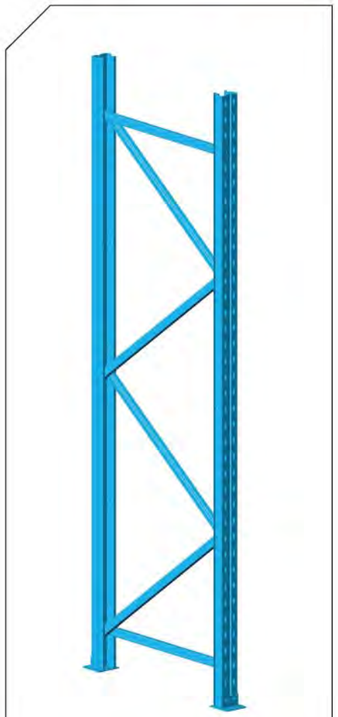



标准活结底板




加强活结底板





柱卡与立柱连接时配有特殊设计安全销；
可以确保横梁在外力撞击后不会脱落.

抱合横梁型号H×W(mm) Box beam dimension			横梁长度(mm) beam length					
			1900	2300	2500	2700	3000	3300
	80×50	每对横梁承载 loading capacity /pair of beams (Kg)	2250	1350	1150	1000	700	500
	100×50		3750	2250	1900	1500	1150	850
	120×50		4500	3450	2900	2300	1700	1350
	140×50		4500	4500	4000	3300	2450	1850
	160×50		4500	4500	4500	4000	3350	2500
	180×50		4500	4500	4500	4500	4400	3300

抱合P型横梁(step box beam)



P80×50　P100×50　P120×50　P140×50　P160×50

高频焊P型横梁(step beam)




P80×50　P110×50　P76.2×63.5　P101.6×63.5　P114.3×63.5

Beam racking · 横梁式货架
Jiangsu Union Logistics System Engineering Co.,Ltd.

横梁货架附件
beam racking components




隔挡
Support bar A



隔挡B
Support bar B
To support diferent size pallet




隔挡C
Support bar C
To support special containers with 4 feet




隔挡D
Support bar D




网式层板
Wire decking



背网
Backing fence



钢制托盘
Steel pallet




防撞护栏
Frame protector



导轨
Truck rail




U型护脚
“U” type foot protector



标准型隔撑
Standard row spacer



“V” 型护脚
Angle steel foot protector



加强型隔撑
Reinforce row spacer